




Dehumidifier  
**DH900**

USER  
MANUAL

aerbyon

## Parts Name

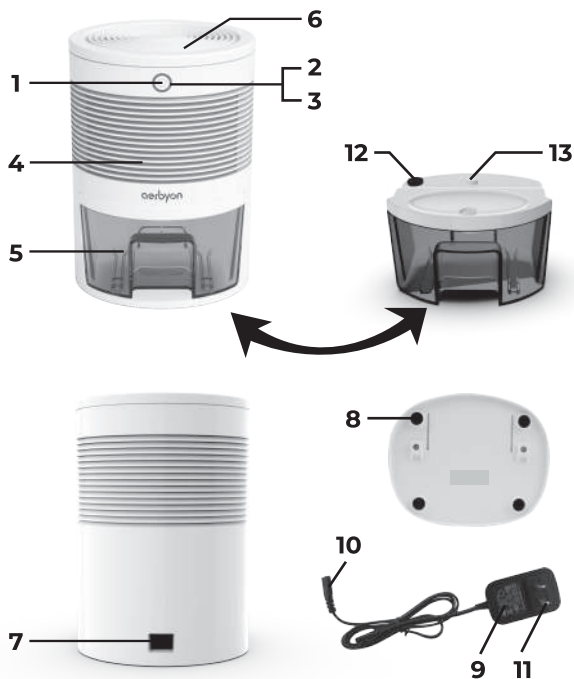

- |                                |   |
|--------------------------------|---|
| <b>1.</b> On/Off button        | <b>8.</b> Rubber foot   |
| <b>2.</b> "On" Green LED       | <b>9.</b> AC/DC switching mode power supply                         |
| <b>3.</b> "Full" Yellow LED    | <b>10.</b> DC power jack  |
| <b>4.</b> Air inlet            | <b>11.</b> AC plug with power cord (plug type is subject to market) |
| <b>5.</b> Removable water tank | <b>12.</b> Water displacement hole                                  |
| <b>6.</b> Dry air outlet       | <b>13.</b> Float switch   |
| <b>7.</b> DC power socket      |   |

## 1. Specifications

Capacity	Approximately 300 ml per day at 30°C
Cooling element	Peltier module
Fan	3" x 3" DC Brushless motor
Power adapter	9 V DC 2.5 Amp
Power consumption	22.5W
Water Level Detector	Automatic switch of with "Yellow" LED indicator when water tank is full
Drying feature	Warm air outlet on top for drying purposes
Product Dimensions	6.1" (L) x 5" (W) x 8.74" (H)
Working environment	Over 15°C, over 40% RH

## 2. Connection

1. After removing the packaging materials, there should be 2 items:
  - a. Mini dehumidifier
  - b. AC/DC power adaptor
2. Plug the DC power jack (10) of AC/DC power adaptor to the DC power socket (7), then connect the AC plug (11) of the AC/DC power adaptor to the appropriate main socket.
3. Press the "On/Off" button (1) The green LED will be turned on. The mini dehumidifier will begin to operate. You should be able to feel the air blowing from dry air outlet (6) [Figure 1]
4. To switch off the unit, press "On/Off" button the mini dehumidifier will be turned off. [Figure 1]



[Figure 1]



[Figure 2]



[Figure 3]

### 3. Removable water tank

When the water tank reaches approximately 900ml of water collected, the unit will be switched off automatically and the "Yellow" LED (3) will be on. [Figure 2] To remove the water tank (5), first switch off the Mini dehumidifier by pressing the "On/Off" button. Then, remove the water tank from the unit and pour the water out to the toilet or bathroom sink. Put the water tank back into the unit. To continue dehumidifying, push the "On/Off" button again. The water tank could be disassembled and cleaned [Figure 3].

### 4. Warnings

1. After having finished using the Mini Dehumidifier the user should switch the unit off by pressing the "On/Off" button.
2. Avoid using the AC/DC power adaptor in wet or damp places, and position it in areas where the air ventilation is good.
3. Keep the front inlet grill and the top outlet free from air blocking materials such as clothing, plastic bag or papers.
4. If the unit has been properly connected and no power is flowing, remove the AC/DC power adaptor and have the dehumidifier unit checked by a qualified electrician.
5. Always keep the unit at an up-right position to avoid water leakage.
6. Mini Dehumidifier should not be operated for a long time. Use a timer to automatically on/off the unit every 12 hours to prolong the lifespan of the unit.

For more information, please visit us at  
[aerbyon.com](http://aerbyon.com)



**aerbyon**

TM and © 2022 Aerbyon LLC. All rights reserved

Dehumidifier  
**DH900**

